


Flex Panel - 6 Rail

Available in 10' & 12' lengths



Flex Connector

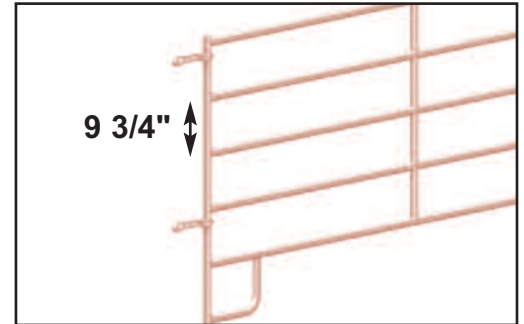

Specifications

- **Posts:** 1 1/8" x 1 3/4" x 16 gauge oval, capped with rubber plug
- **Rails:** 1 1/8" x 1 3/4" x 16 gauge oval
- **Braces:** 1" x 16 gauge round tubing, notched & welded
- **Height:** 72" tall
- **Connectors:** Patented Hi-Density Molecular Rubber with UV Inhibitors
- **Paint:** Baked on powder coat paint
- **Weight (in pounds):** 10' - 78, 12' - 92
- **Warranty:** 1 year on panel, 3 years on flex connectors
- **Steel:** 1017 carbon steel rated at 58,000 psi

Highlighted Features & Advantages



- Rubber connector reduces noise and absorbs impact
- Versatile and quick attachment to other panels and on uneven ground
- Lightweight, easily portable
- Longer life connectors with UV Inhibitors
- Easy to move on 12" leg supports
- Up to 4 connectors per post
- Less than 1" gap between panels

Suggested Applications

- Horses in light confinement
- Portable pasture panels
- Round pens

Flex Panel

Parts List

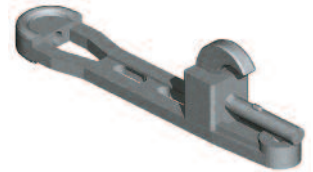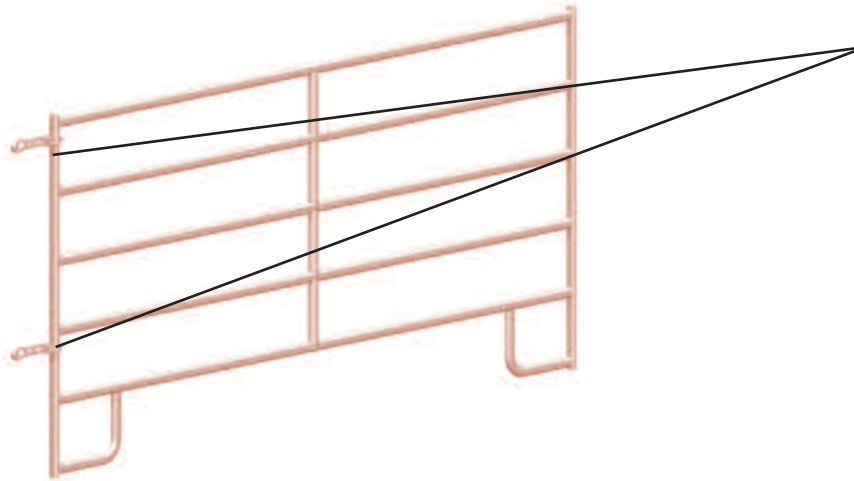


MCFCON:
connector with hook pin




MCFPRC:
connector strap



MCFPCH: hook pin

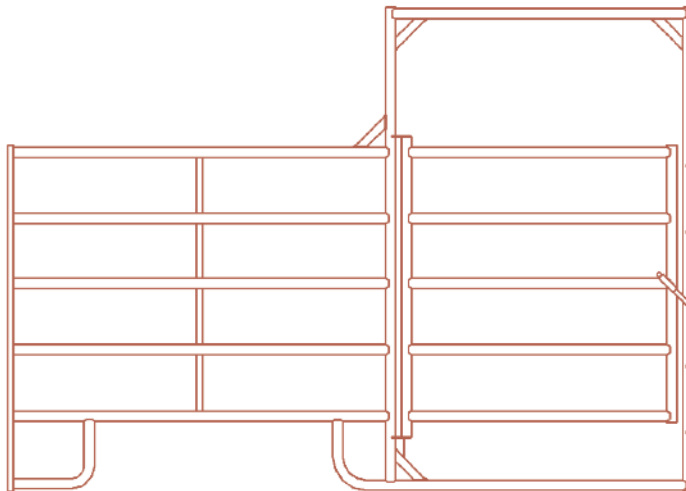

OVLCAP: oval rubber cap



PR-15:
latch