



Super Six Gate


Available in 8', 10', 12', 14' & 16' lengths

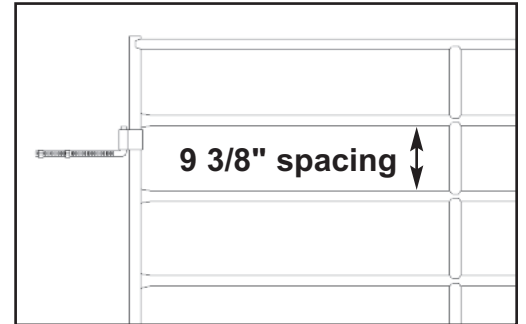


Length refers to size of opening. The length of the gate is actually 5 1/2" shorter. i.e.: 10' gate is actually 9' 6 1/2"

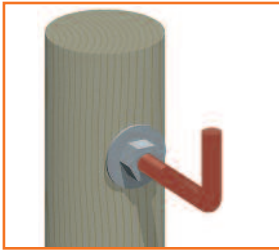

L-bolt hinge

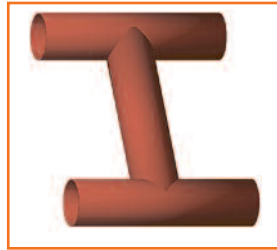

Notched vertical bracing & corners

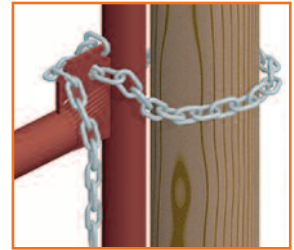

Posi-Lock chain latch

Specifications

- **Height:** 59"
- **Posts:** 2" x 14 gauge round - capped with rubber plug
- **Rails:** 6 - 2" x 14 gauge round, with 9 3/8" spacing
- **Braces:** 1 1/2" x 16 gauge round, notched & welded
- **Chain:** 1/4" x 48" galvanized proof coil with 1/4" quick link
- **Hinge:** 1" x 14 3/4" adjustable L-bolt
- **Paint:** Baked on powder coat paint
- **Weight (in pounds):** 8' - 107, 10' - 128, 12' - 148, 14' - 169, 16' - 193
- **Steel:** 1017 carbon steel rated at 58,000 PSI
- **Warranty:** 1 Year

Highlighted Features & Advantages


- Square corners for animal safety
- Versatile & long lasting hinges
- Height offers security from gate leapers
- Optimum strength with notched vertical bracing
- Ideal for heavy confinement
- Long 48" chain with security latch
- Balanced gate with no weak areas

Suggested Applications

- Rodeo arenas
- Bison pens
- Elk pens
- Bull pens
- Stallion pens
- Crowding areas
- Heavy confinement

Super Six Gate

Parts list

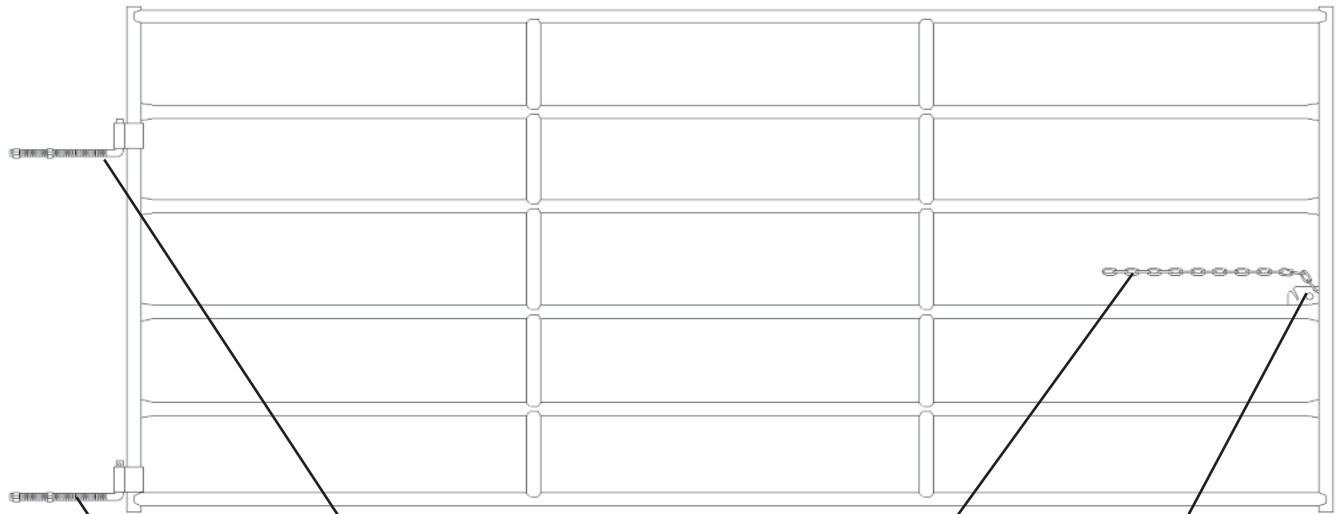

HINGSD:
hinge bolt
with collar



HINGS2:
hinge bolt
with pin



HD-6: chain




SSD-5: chain
hook plate



CAP2
2" rubber cap
on both posts

Super Duty Gate

Parts list

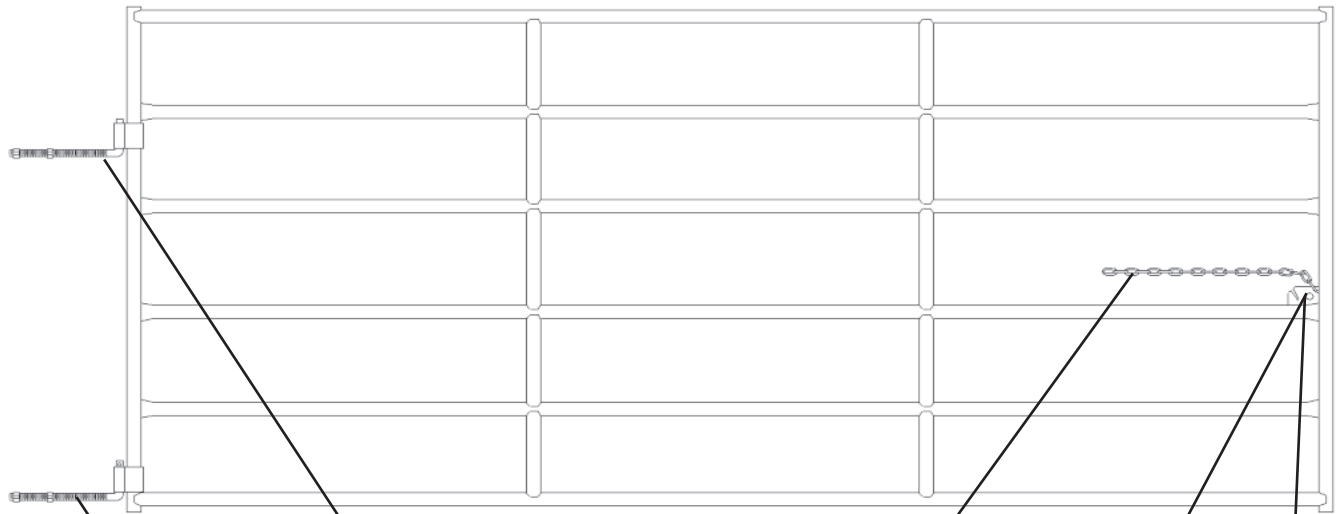

HINGSD:
hinge bolt
with pin



HINGS2:
hinge bolt
without pin



HD-6: chain



SSD-5: chain
hook plate

SD-5: 1/4" quick link



CAP2
2" rubber cap
on both posts